



Scorpio Automation™

www.scorpioautomation.in


Automatic Revolving Door



Safety Functions:

- Vertical safety switch.
- Horizontal safety light barriers.
- Emergency stop button.
- Force-sensitive Control.
- Torque Control Function.
- Panic breakout.
- Night Security Door.
- Disabled push button.
- Glass Protective Door Clamp

Automatic Revolving Door

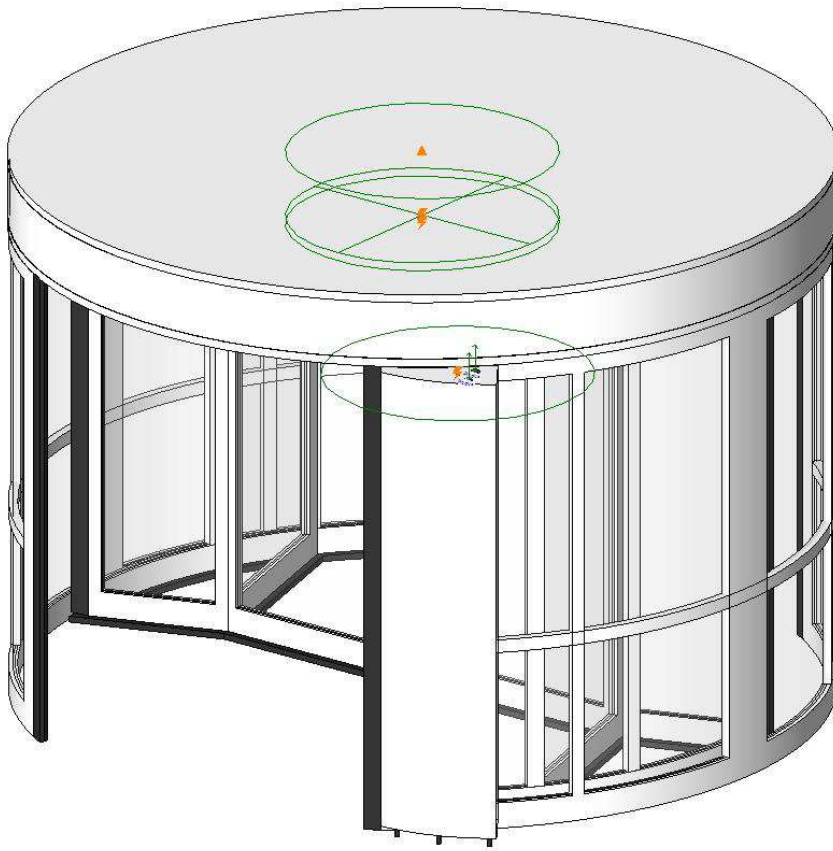

Application:

Hotels, administration buildings, shopping malls, exhibition and conference centers, multiplex cinemas, railway stations, airport buildings, sports facilities, hospitals etc

Technical Specification:

- Power supply : 220VAC \pm 10%,50HZ
- Power Consumption : 360W/AC
- Main Fuse : 5A
- Range of high speed adjusts: 1-4r.p.m.
- Range of low speed adjust : 0.5-2.5 r.p.m
- Ambient temperature : -25 degree ~ 50 degree
- Ambient Humidity : <90%

All glass meets the requirements of the international standards.

1. Curved glass is 16mm (8+8) thick clear laminated glass.
2. Flat glass is 12mm thick toughened glass.
3. Ceiling is constructed of 16mm(8+8) semi-laminated and semi -toughened safety glass